




Barrier made of plain oval folded tubular steel 60x30x1.5 mm with central curved, concave or convex current made of oval tubular steel 40x20x1.5 mm. All metal parts are galvanised and coated with thermosetting polyester powder. Prepared with holes Ø 10 mm for ground fixing through mechanical dowels (not included) or for ingrounding.

## technical data

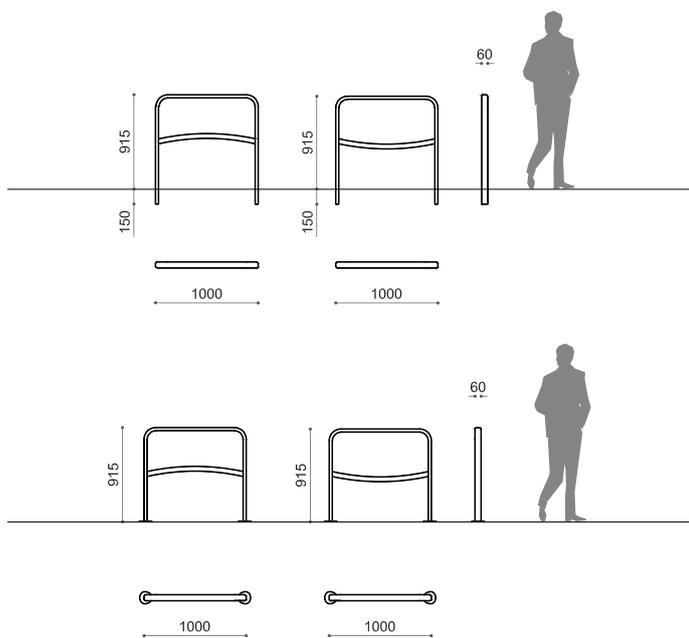

1000x60 mm  
H 915 mm (+ 150 mm)  
7 kg

1000x60 mm  
H 915 mm  
8 kg



Galvanized and powder coated steel



Prepared with holes Ø 10 mm for ground fixing through mechanical dowels (not included) or for ingrounding

