
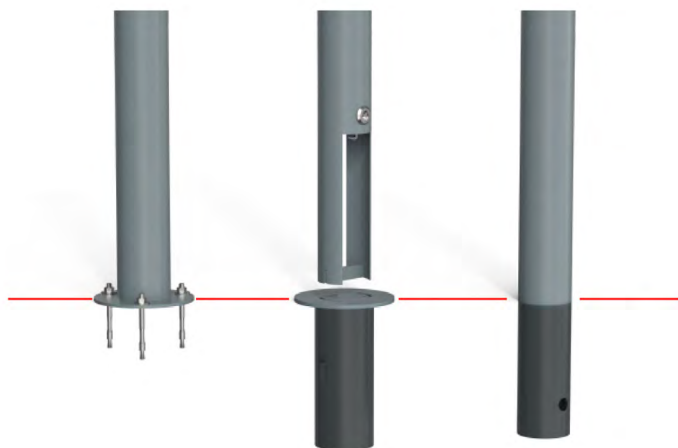


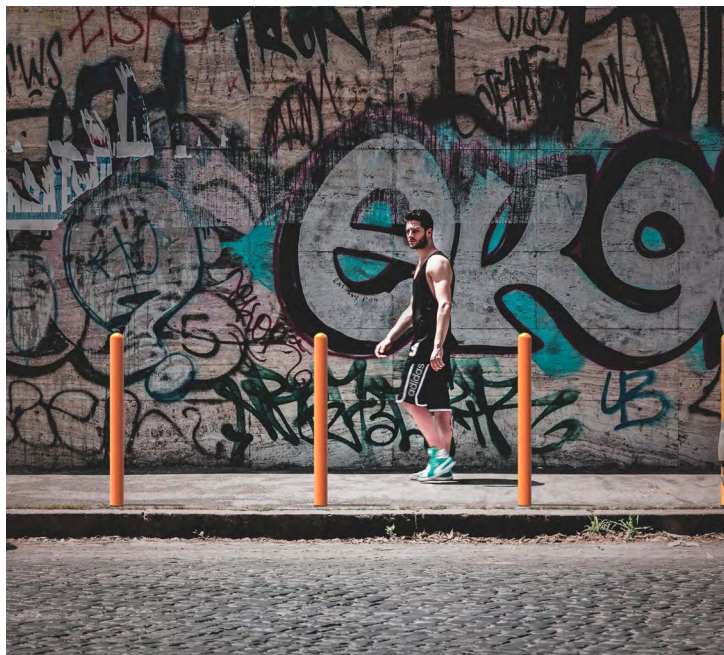


Pedestrian bollard made of galvanised tubular steel $\varnothing 102 \times 2$ mm with flat, cylindrical or hemispherical upper cap made of 0.8 mm thick deep-drawn galvanised sheet metal. On request the bollard can be supplied complete with screwed lateral eyebolts for the application of steel chain (not included). If removal of the bollard is required, there is a version equipped with a steel coupling (to be cemented flush with the walking surface) with a special triangular key lock that allows the bollard to be removed.

All metal parts are galvanised and coated with thermosetting polyester powder.

Prepared with holes $\varnothing 10$ mm for ground fixing through mechanical dowels (not included) or for ingrounding.

technical data

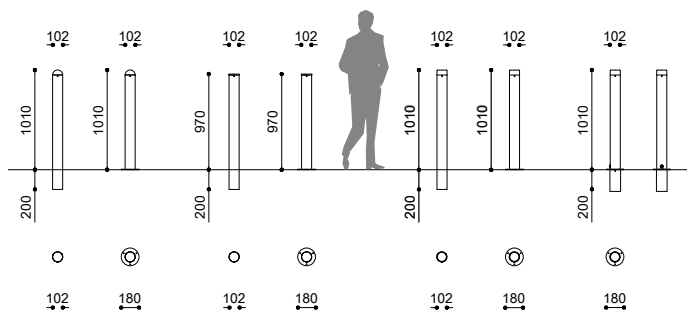

PALETTE S

$\varnothing 102$ mm H 1010 mm (+ 200 mm)

6 kg

$\varnothing 102$ mm $\varnothing 180$ mm H 1010 mm

6 kg

PALETTE P

$\varnothing 102$ mm H 970 mm (+ 200 mm)

5 kg

$\varnothing 102$ mm $\varnothing 180$ mm H 970 mm

5 kg

PALETTE C


$\varnothing 102$ mm H 1010 mm (+ 200 mm)

6 kg

$\varnothing 102$ mm $\varnothing 180$ mm H 1010 mm

6 kg

$\varnothing 102$ mm $\varnothing 180$ mm H 1010 mm (+ 220 mm) 6 kg



Galvanized and powder coated steel



Prepared with holes $\varnothing 10$ mm for ground fixing through mechanical dowels (not included) or for ingrounding



Pair of eyebolts in galvanized and powder coated steel
Snap hook in galvanized and powder coated steel
Snap hook in powder coated steel

